

Construction Stormwater Management Plan For

Gear Estates

1156 18 Road, Fruita, Colorado 81521

10-25-23

CSWMP Preparer: Scott Sorensen
123 N 7th Street
Grand Junction, CO 81501
970-242-7540

Introduction

The following CSWMP is organized and presented as follows:

Section 1: Qualified Stormwater Manager(s)

Section 2: Spill Prevention and Response Plan

Section 3: Materials Handling

Section 4: Potential Sources of Pollution

Section 5: Implementation of Control Measures

Section 6: Site Description

Section 7: Site Map

Section 8: Final Stabilization and Long-Term Stormwater Management

Section 9: Inspection Reports

Section 10: CSWMP Preparer Signed Statement

Appendix A: Site Aerial View

Appendix B: Site Map

Appendix C: Inspection Report

Appendix D: Best Management Practices

Section 1. Qualified Stormwater Manager

Please list the individuals(s) by Title and Name who are designated as the site's Qualified Stormwater Manager(s) responsible for implementing the CSWMP in its entirety.

1. TBD
2. _____
3. _____

Provide Name, Phone number and Email address and/or 3rd party inspection company contact information here, if applicable.

Name: TBD

Phone: _____

Email: _____

Section 2. Spill Prevention and Response Plan

Briefly outline response procedures to a spill (e.g. fuels, oils, chemicals, paints, solvents, liquid admixtures, cement) by providing cleanup responsibilities and site contact information.

Cleanup of spills should begin immediately. The spill shall be assessed and the severity determined. Contact the spill cleanup coordinator and Qualified Stormwater Manager immediately. No emulsifier or dispersant should be used. On all units requiring refueling, absorbent, materials should be packaged in small bags and stored in small drums or containers. Absorbent materials shall not be disposed into any drainage. It is the contractor's responsibility to make available all emergency phone number at the construction site and to notify the responsible agencies as soon as possible. It is the contractor's responsibility to ensure proper cleanup in a timely manner. Spill Cleanup Kits shall be kept on site and all personnel should be trained in using the Spill Cleanup Kits.

Concrete washout areas shall be provided so that materials and wash water cannot discharge from the site or into a storm drain system or stream.

For NON-HAZARDOUS materials such as gasoline, diesel paint, or oil spilled in SMALL QUANTITIES that do not enter state water or threaten to do so, the following measures shall be implemented:

- i. Use absorbent materials to contain spills and clean the area of residuals.*
- ii. Do not hose down spill area with water*
- iii. Dispose of the absorbent material properly.*

For NON-HAZARDOUS materials that that qualify as a SIGNIFICANT SPILL, or spills of any size that enter state waters or have the potential to do so, the following measures shall be implemented:

- i. Contact the CDPHE Environmental Emergency Spill Reporting Line (1-877-518-5608) within 24 hours of the spill event. A written notification of the CDPHE-EMP is necessary within 5 days.*
- ii. Contact the Mesa County Stormwater Division (970-263-8201).*
- iii. Contact the Colorado State Patrol 24-hour hotline (1-303-239-4501) if the spill is on a state highway.*
- iii. Report spill to foreman on site.*
- iv. Cleanup spill immediately. Use absorbent materials if the material is on an impermeable surface. Construct*

earthen dikes to contain spills on dirt areas. If rainfall is present, cover the spill with a tarp to prevent contaminated runoff.

For spills involving HAZARDOUS MATERIALS, the following measures shall be implemented:

- i. Report spills to project foreman.
- ii. Contact the local emergency response team by dialing 911.
- iii. Contact the CDMPHE-EMP Environmental Emergency Spill Reporting Line (1-877-518-5608) within 24 hours of the spill event.
- iv. Contact the Mesa County Stormwater Division (970-263-8201).
- v. Contact the Colorado State Patrol 24-hour hotline (1-303-239-4501) if the spill is on a state highway.
- vi. Call the CDOT illicit discharge hotline if spilled material spreads to a CDOT storm drain or waterway adjacent to CDOT right-of-way.
- vii. Construction personnel shall not try to clean up the spill. A licensed contractor or HazMat team shall be used to properly clean up spills.

Section 3. Materials Handling

Describe the control measures that will be used at the site to minimize impacts from handling, storing and disposing/ recycling of **significant materials**, which is any chemical or hazardous substance that exhibits ignitability, corrosivity, reactivity or toxicity characteristics that could potentially contribute pollutants to stormwater runoff.

a. On-Site chemical storage:

The project does not anticipate mixing or handling of chemical or hazardous substances other than construction equipment fueling and servicing operations. Fueling operations shall only occur with physical observation and monitoring to avoid fuel overflow. Grease cartridges shall be properly disposed of in approved containers on the jobsite.

b. Label System:

This section applies only when chemicals are stored onsite during any portion of the project. If chemicals are stored onsite, MSDS Sheets for these will be completed and clearly labeled in a notebook. This notebook will be located onsite.

c. Maintenance and Inspection:

Areas shall be inspected every 14 days after a storm event. All equipment and vehicles will be inspected routinely for leaks. A sufficient supply of cleanup materials will be kept at all maintenance areas and areas where leaks or spills may occur.

d. Waste Handling

Portable concrete washout facilities will be provided to wash out concrete trucks at the project site. Remaining waste will be disposed of and/or recycled in the appropriate manner with daily oversight by a Site manager.

Section 4. Potential Sources of Pollution

List and identify ALL potential pollutant sources that may reasonably be expected to affect the quality of stormwater discharges associated with construction activity from the site.

A. Disturbed and stored soils

Site Clearing and Grubbing, Site Grading and Haul Routes can pulverize native soils and create airborne sediment (dust) from disturbed soils. These areas shall be sprayed with a water truck as needed to prevent airborne sediment.

Stored stockpiles from utility trenches, building foundations and loose bank material is sediment shall be contained with down gradient earth berms at the downstream side or toe of slope on stockpiles.

Additional control measures may include dust suppression with a water truck, vehicle tracking controls and maintaining pre-existing vegetation, when stockpiles sit for more than 14 days, tarps, tackifier, hydro seed or other 'crusting' methods will be used as temporary stabilization to prevent windblown sediment.

B. Vehicle tracking of sediments

Vehicle Tracking Control will be provided at the construction site entrance, and will be large clean angular rock. Control measures to mitigate off-site vehicle tracking include angular aggregate tracking pads at construction access points, operator awareness, exit surveys and street sweeping.

C. Management of contaminated soils

This project has the potential to contaminate soils with fuels, oils, grease, paints, solvents, dry mix chemical, tool cleaning waste and/or chemical, porta-john chemical, stucco and grout mixing operations, concrete washout waste, fertilizers, pesticides, detergents and/or industrial, municipal or agricultural waste. Petroleum products and liquid chemical over 55 gallons will have secondary containment. The site will provide a concrete washout for concrete trucks and other masonry waste. All other spills to the ground will be cleaned up according to the Spill Response procedures outlined in Section 2.

D. Loading and unloading operations

This project has the potential for spills during material delivery while loading or unloading. Loading and unloading operations shall be within the limits of disturbance as outlined on the site plan. Site personnel will clean up spills by following the Spill Prevention and Response Plan in Section 2.

E. Outdoor storage activities

All construction materials that pose a potential pollutant risk to ground or surface water when exposed to rainfall must be stored and protected from rainfall (trailer, zircon, or other approved equal) in the designated materials storage areas. All chemicals and fertilizers must be stored in weather proof containers or otherwise be protected from rainfall in the designated building materials storage areas.

F. Vehicle and equipment maintenance and fueling

Vehicle fueling and equipment maintenance has the potential to spill fuel, oils and other fluids to the ground. Construction equipment will be fueled and maintained offsite, however, if mechanical failure does occur, clean-up will follow the Spill Prevention and Response Plan in Section 2.

G. Significant dust or particulate generating processes

Haul road, earthwork operations and stockpile materials left unattended for any length of time has the potential to generate significant dust. Wood or concrete saw cutting can also generate airborne particulates. Control measures include surface roughening, moisture conditioning and parking and walking from paved surfaces. Saw cuttings will be swept and collected at regular intervals and not allowed to accumulate.

H. Routine maintenance activities involving fertilizers, pesticides, herbicides, fuels, solvents, oils, etc.

There is a potential for a spill during routine maintenance activities. In the event of a spill, site personnel will follow the Spill Prevention and Response Plan in Section 2.

I. On-site waste management practices (waste piles, liquid wastes, dumpsters)

On site waste will be generated during all phases of construction. Potential pollutants include concrete wash water, tool cleaning, asphalt debris, worker trash, wind-blown debris, building construction materials to include paint, solvents, mortar, grout, masonry, stucco, punctured bags of dry mix chemicals or additives, leaking or uncapped liquid chemicals, saw cutting debris, drywall debris, roofing materials, and other loose building material hardware and plastic.

Control measures include good housekeeping procedures, removing waste before it is allowed to accumulate, secondary containment on all mixing operations and familiarity with site personnel responsible for spill response.

J. Concrete truck/equipment washing, including washing of the concrete truck chute and associated fixtures and equipment

Concrete waste and concrete wash water are potential pollutants that will be generated on-site. Control measures designed for concrete washout waste will be implemented. This could include a portable metal containment tank, or an impermeable synthetic liner designed to control seepage when site soils lack the buffering capacity needed prior to reaching groundwater

K. Dedicated asphalt, concrete batch plants and masonry mixing stations

No asphalt or concrete batch plants are anticipated.

L. Non-industrial waste sources such as worker trash and portable toilets

Worker trash and portable toilets have pollutant potential. The site will provide waste receptacles and portable toilets on the job site. Dumpsters will be routinely emptied or covered to prevent wind-blown debris and portable toilets will be staked down to prevent tipping during high winds.

Section 5. Implementation of Control Measures

The CSWMP must include the design specifications of ALL control measures used on the project. Include applicable drawings, dimensions, installation, materials, implementation, control measure-specific inspection expectations and maintenance requirements.

Please see Control Measures in Appendix D.

Section 6. Site Description

A. Provide a description of the construction activity that is planned, to include the physical location, address and cross streets, type of project, and a summary of the work

Gear Estates is an 8-lot residential subdivision that includes a new residential urban local street, typical utility main/service installation, overlot grading and a stormwater water quality facility.

Land disturbing activities at the site will consist of clearing and grubbing, material stockpiling, site grading, excavations, cuts and fills, utility installation, concrete work, building foundations, building construction, asphalt pavement, and final landscaping.

Construction activities may include, but are not limited to, material import/export, concrete and asphalt placement, underground utility installation, vertical construction and landscaping.

B. The proposed sequence for major activities and the planned implementation of control measures for each phase

- 1) *Installation of site access points, perimeter sediment control measures and offsite control measures.*
- 2) *Clearing and Grubbing.*
- 3) *Site Grading.*
- 4) *Underground Utility Installation.*
- 5) *Building Foundation.*
- 6) *Building Construction*
- 7) *Installation of temporary, interior control measures, such as a concrete washout area.*
- 8) *Concrete and Asphalt placement.*
- 9) *Construction of permanent stormwater control measures, such as a water quality pond.*
- 10) *Revision of temporary control measures to accommodate final landscaping.*
- 11) *Sodding and final landscaping.*
- 12) *Removal of temporary control measures and final cleaning of permanent control measures.*

C. Estimates of the total acreage of the site, and the acreage expected to be disturbed by clearing, excavation, grading, and any other construction activities

Entire lot: 1.23 acres. Area to be disturbed: 1.23 acres.

D. A summary of any existing data used in the development of the construction site plans or CSWMP that describe the soil or existing potential for soil erosion

There are no unusual soils or geologic conditions present on the site that will prohibit the construction of the subdivision. The area is typical of the Colorado River Valley with formational and weathered shales overlain by gravels as well as sandy, silty, clay. A subsurface geotechnical investigation report has been prepared for the project. According to the report groundwater was encountered at two (2) test pits and at level of 8.0 and 6.0 feet below existing ground.

E. A description of the existing vegetation at the site and an estimate of the percent vegetative ground cover

Vegetation is sparse on the site with an estimated percent vegetative ground cover at 25%.

F. A description of any allowable non-stormwater discharges at the site, including those being discharged under a low-risk discharge guidance policy

The following non-stormwater discharges are allowed under this permit if they are identified in the CSWMP and they have appropriate control measures in place:

1. *Discharges from uncontaminated springs that do not originate from an area of land disturbance*
2. *Discharges to the ground of concrete washout water to include the washing of concrete tools and mixer chutes*
3. *Discharges of irrigation return flow*
4. *Emergency fire-fighting activities*

It is understood that this permit does not authorize the discharge of non-storm water except those allowed above and it is understood that the project will need a separate de-watering permit to discharge groundwater off-site or to the MS4 (Municipal Separate Storm Sewer System) infrastructure.

- G. A description of areas receiving discharge from the site, including a description of the immediate source receiving the discharge. If the stormwater discharge is to a MS4 (Municipal Separate Storm Sewer System), provide the name of the entity owning that system, the location of the storm sewer discharge, and the ultimate receiving water(s)

Stormwater drains generally at a north-northwest direction to be collected by the GVDD Denton Drain. With development, majority of runoff will be collected by the new Sprocket Court and it's new storm sewer system and routed to the new water quality facility. Runoff will discharge to a City storm sewer system which eventually discharges into the Little Salt Wash. A small area along the north will be piped into the Denton Drain.

- H. A description of all stream crossings located within the construction site boundary

The site does not have any stream crossings within the construction site boundary.

Section 7. Site Map

The CSWMP must include a site map showing the entire area, control measures and runoff direction flow arrows:

- A. Construction site boundaries;

The site map clearly identifies the boundaries of the property. Please see Appendix B.

- B. Flow arrows that depict stormwater flow directions on-site and runoff direction;

The site map clearly identifies on-site and runoff direction with flow arrows. Please see Appendix B.

- C. All areas of ground disturbance including areas of cut and fill;

The site map includes all areas of ground disturbance. Please see Appendix B.

**Since trying to fit existing and planned contour lines on the map can overcrowd it, it is acceptable and encouraged to include a separate map either with contour lines and preferably, color coded. However, including existing and new contours on the drawing will be acceptable. Please make sure the contours are properly labeled. In some cases, hatching may be needed but hatching should generally be avoided if it will make the drawing too difficult to read.*

- D. Areas used for storage of soil;

The site map includes all areas used for storage of soil. Please See Appendix B.

**Since this determination is often made by the contractor just prior to construction, a note to that effect on the map along with the symbol to be used by the contractor to indicate those areas in the legend will be sufficient at the time of submittal. The contractor must make the requisite changes on the map before storing materials on the site.*

- E. Locations of all waste accumulation areas, including areas for liquid, concrete, masonry, and asphalt;

The site map includes all areas for liquid, concrete, masonry, and asphalt. Please see Appendix B.

F. Locations of all dedicated asphalt, concrete batch plants and masonry mixing stations;

There are no asphalt, concrete, or masonry mixing stations or batch plants.

**Identify initial areas. If there will be no dedicated asphalt or concrete batch plants on this project, document it here as well as in Section 4 Potential/Sources of Pollution.*

G. Locations of all structural control measures;

The site map includes all structural control measures. Please see Appendix B.

**These include, but are not limited to, straw wattles/sediment control logs, silt fence, vehicle tracking controls, compacted earthen berms, erosion control blankets, drainage swales, sediment traps, inlet protection, outlet protection, gabions, cutback curbs, etc. The map must clearly show the specific locations of each individual structural control measure implemented on the project. Please remember, that every control measure selected for your project must have a corresponding design and maintenance specification included in Section 5 Implementation of Control Measures.*

H. Locations of all non-structural control measures;

The site map includes all non-structural control measures. Please see Appendix B.

**These include, but are not limited to, surface roughening, temporary or permanent vegetation, mulching, sod stabilization, vegetative buffer strip, etc. Please remember that every control measure selected for your project must have a corresponding design and maintenance specification included in Section 5 Implementation of Control Measures.*

I. Locations of springs, streams, wetlands, and other state waters; including areas that require pre-existing vegetation be maintained within 50 feet of a receiving water, unless infeasible, must be documented;

There are no springs, streams, wetlands or state waters on the project site.

J. Locations of all stream crossings located within the construction site boundary;

The project does not have any stream crossings within the site boundaries.

Section 8: Final Stabilization and Long-Term Stormwater Management

Describe the practices used to achieve final stabilization of all disturbed areas at the site and any planned practices to control pollutants in stormwater discharges that will occur after construction operations are completed

Final Stabilization will be achieved when all ground surface disturbing activities at the construction site are complete, through either a uniform cover of an individual plant density of at least 70% of pre-disturbance levels or equivalent permanent pavement, hardscape, xeriscape or stabilized driving surface. Temporary CM's will remain in place until final stabilization has been reached, but will be removed once final stabilization has been achieved.

For residential sites, the permittee understands that they may remove residential lots from permit coverage once the lot is sold, a certificate of occupancy has been issued, the lot is less than an acre of disturbance, all construction activity by the permittee is complete, the permittee is no longer responsible for final stabilization of the lot, and the CSWMP Map has been modified.

Final stabilization will be designed, installed and approved by a Professional Engineer through a final drainage report where an appropriately sized, permanent water quality control measure may be implemented to control the discharge of pollutants to the MS4 or any unnamed waterway in the state of Colorado, after construction.

Through an Operations and Maintenance Agreement with the Mesa County Stormwater Division, the permittee or designee, agrees to conduct a yearly inspection of any permanent water quality control measure in the permitted area and ensure that it continues to operate and function as designed.

Section 9. Inspection Reports

Does the CSWMP include documented inspection reports in accordance with the permit?

A. Is the inspector a Qualified Stormwater Manager?

The construction contractor for the project has not been identified at this time and they will be responsible for providing stormwater management controls and inspections on the project.

B. Do inspection records meet the minimum required frequency?

Site inspections will start within 7 days of the start of construction. Inspections will be done once every 7 calendar days or once every 14 calendar days with post-storm event inspections conducted within 24 hours of any precipitation or snow melt event that causes erosion.

C. What areas will be inspected for evidence of, or the potential for, pollutants leaving the construction site boundaries, entering the stormwater drainage system, or discharging to state water?

Inspections will include the site perimeter, all disturbed areas, designated haul routes, material and waste storage areas exposed to precipitation and locations where stormwater has the potential to discharge offsite.

D. Additional inspection report requirements

All implemented control measures will be visually verified to be in effective operational condition and to work as designed to minimize pollutant discharges, identify new potential sources of pollutants and notify the permittee of any corrective actions that are necessary.

**The inspection report will include the date, Name and Title of the person conducting the inspection, weather conditions, phase of construction, estimated acreage of disturbance, location(s) of discharges of sediment or other pollutants from the site, location(s) of control measures requiring routine maintenance, location(s) and identification of additional control measures needed that were not in place at the time of inspection, a description of the minimum inspection frequency and any deviations from the minimum inspection schedule. Each report will conclude with the Qualified Storm water Manager signing and dating below the following statement:*

"I verify that, to the best of my knowledge and belief, all corrective action and maintenance items identified during the inspection are complete, and the site is currently in compliance with the permit."

Section 10. CSWMP Preparer Statement

"I certify, under penalty of law, that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations."

CSWMP Preparer: _____

Date: _____

Appendix A: Site Aerial View


Appendix B: Site Map

Appendix C: Inspection Report

Appendix D: Best Management Practices

APPENDIX A
SITE AERIAL VIEW



Gear Estates

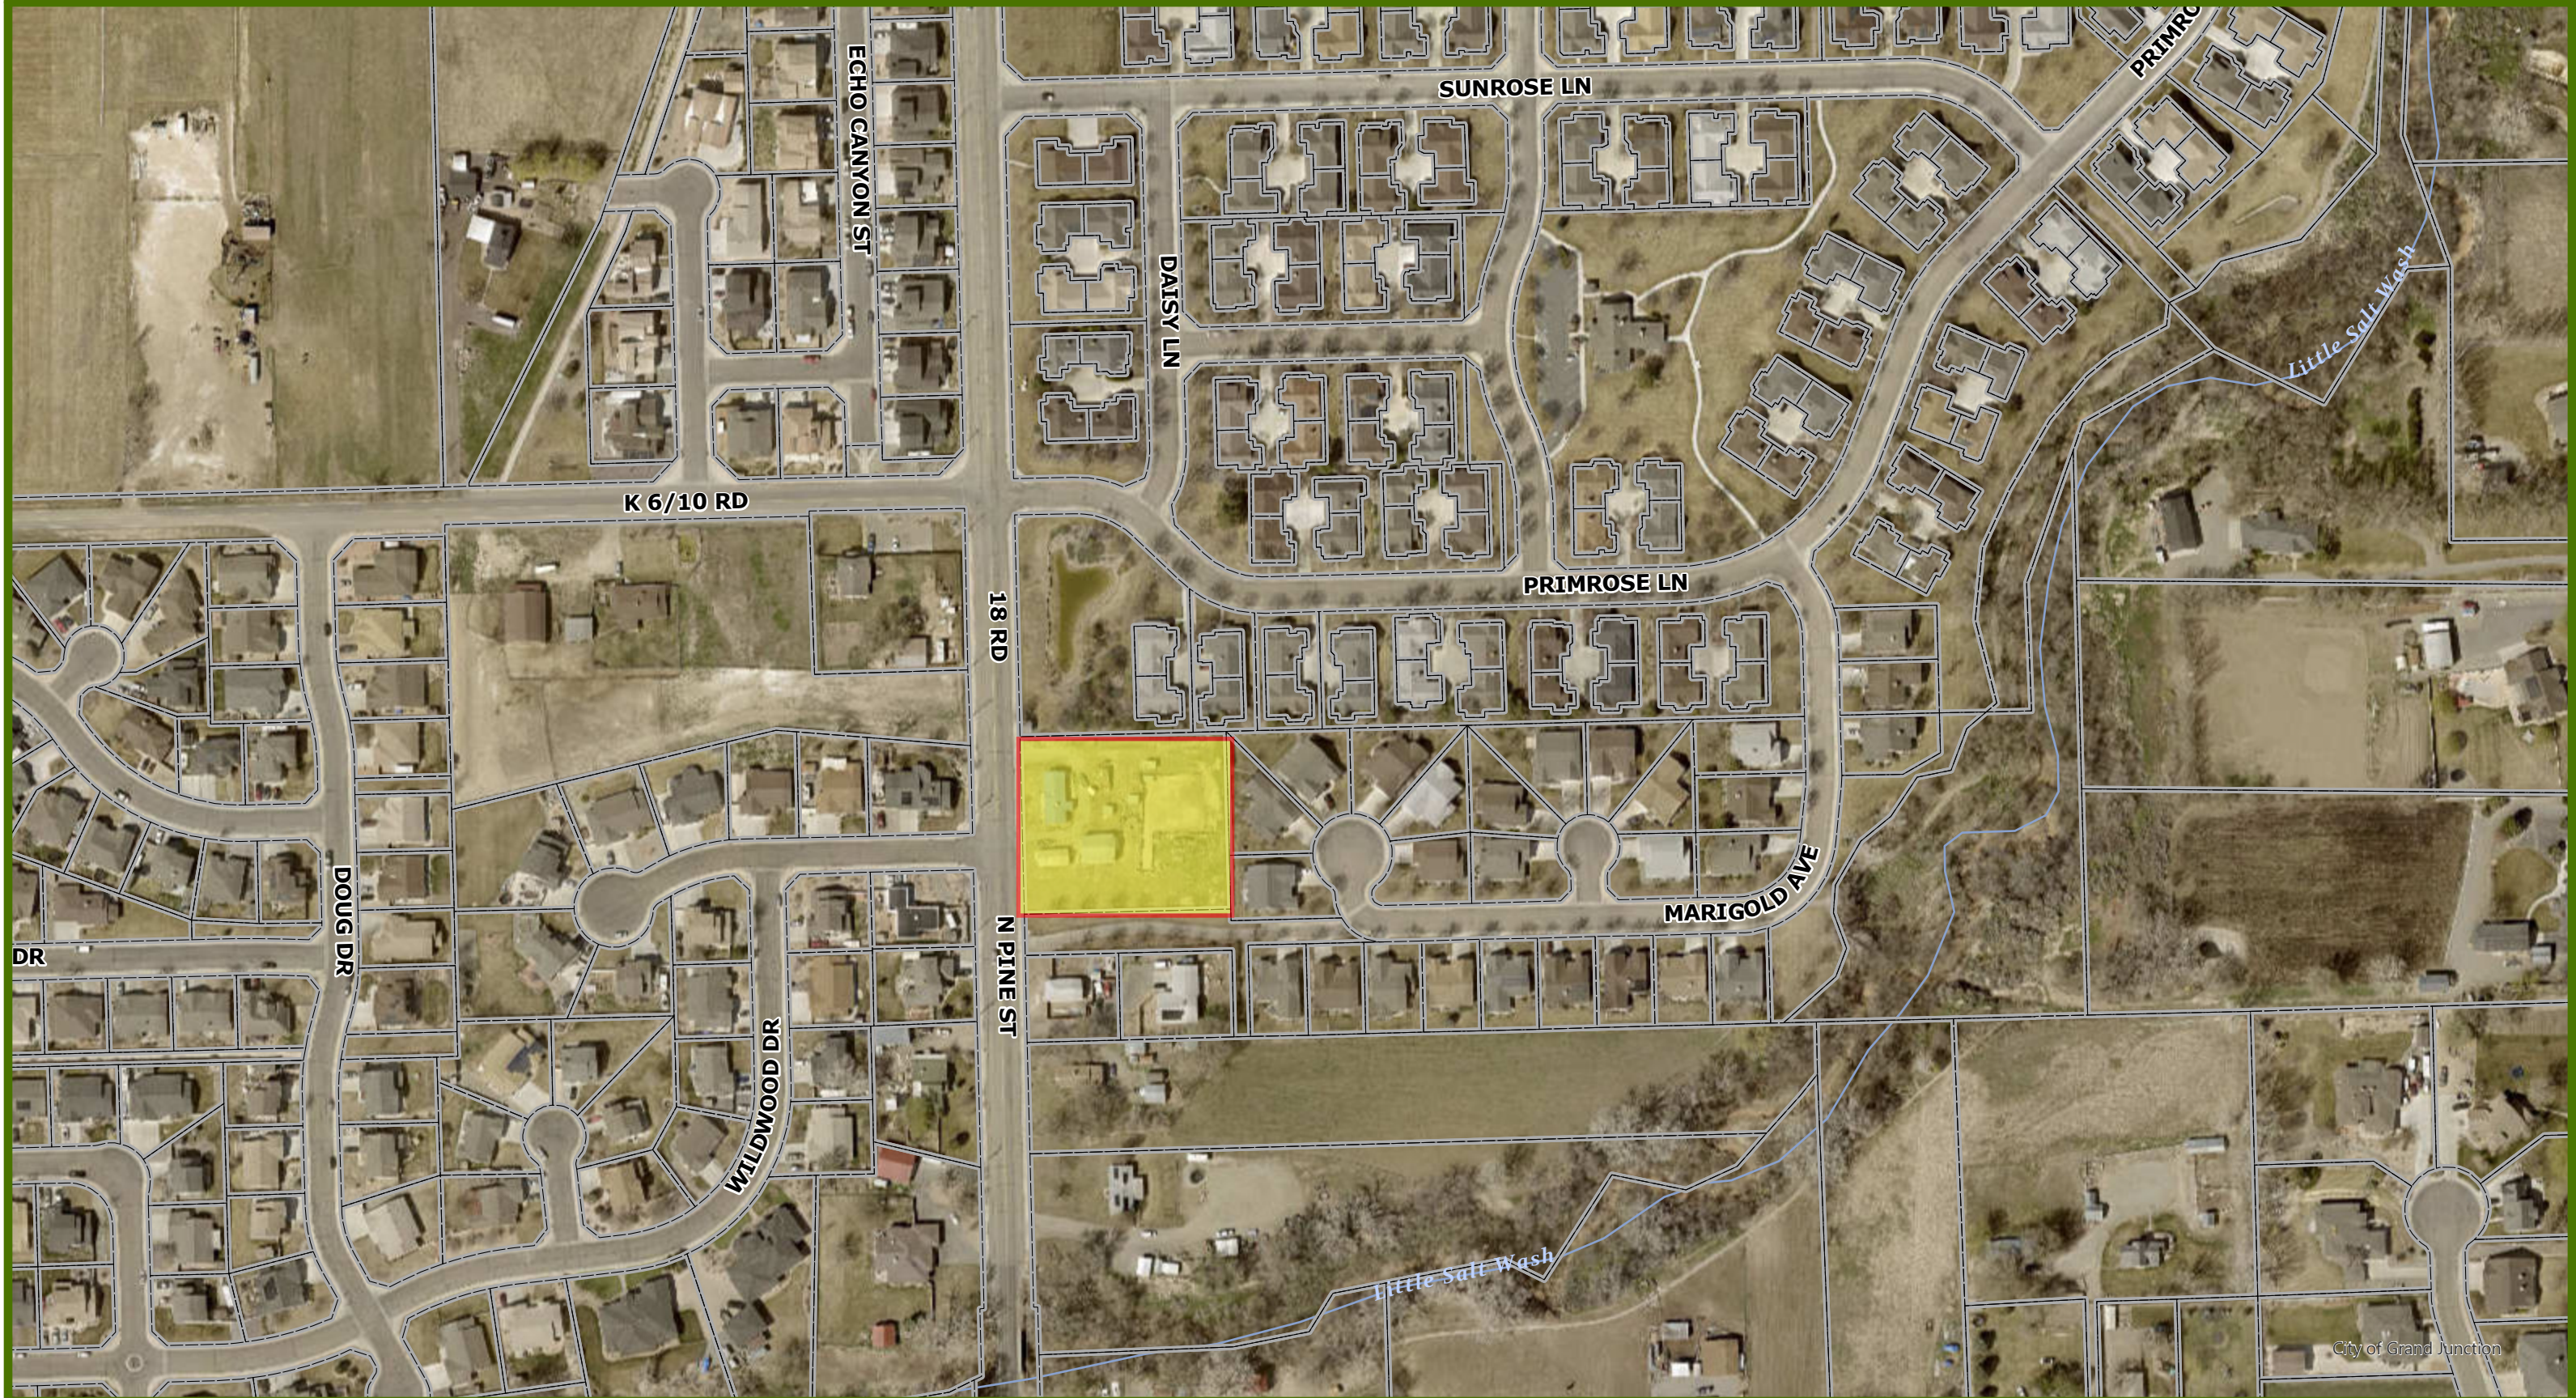

Printed: 10/17/2023
1 inch equals 188 feet
Scale: 1:2,257

APPENDIX B

SITE MAP

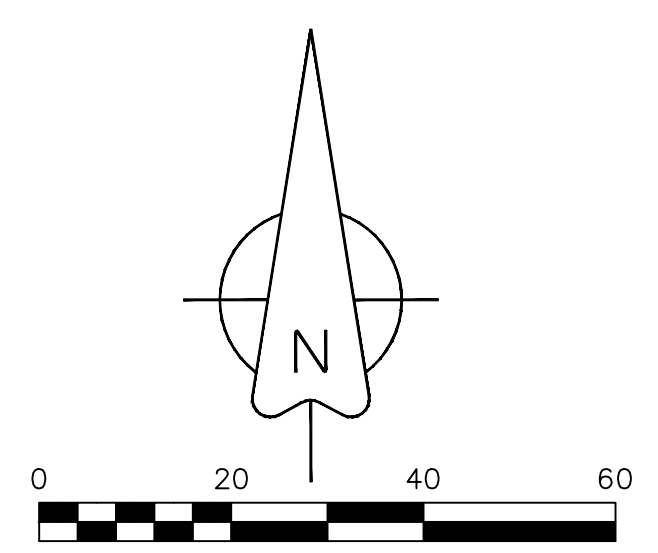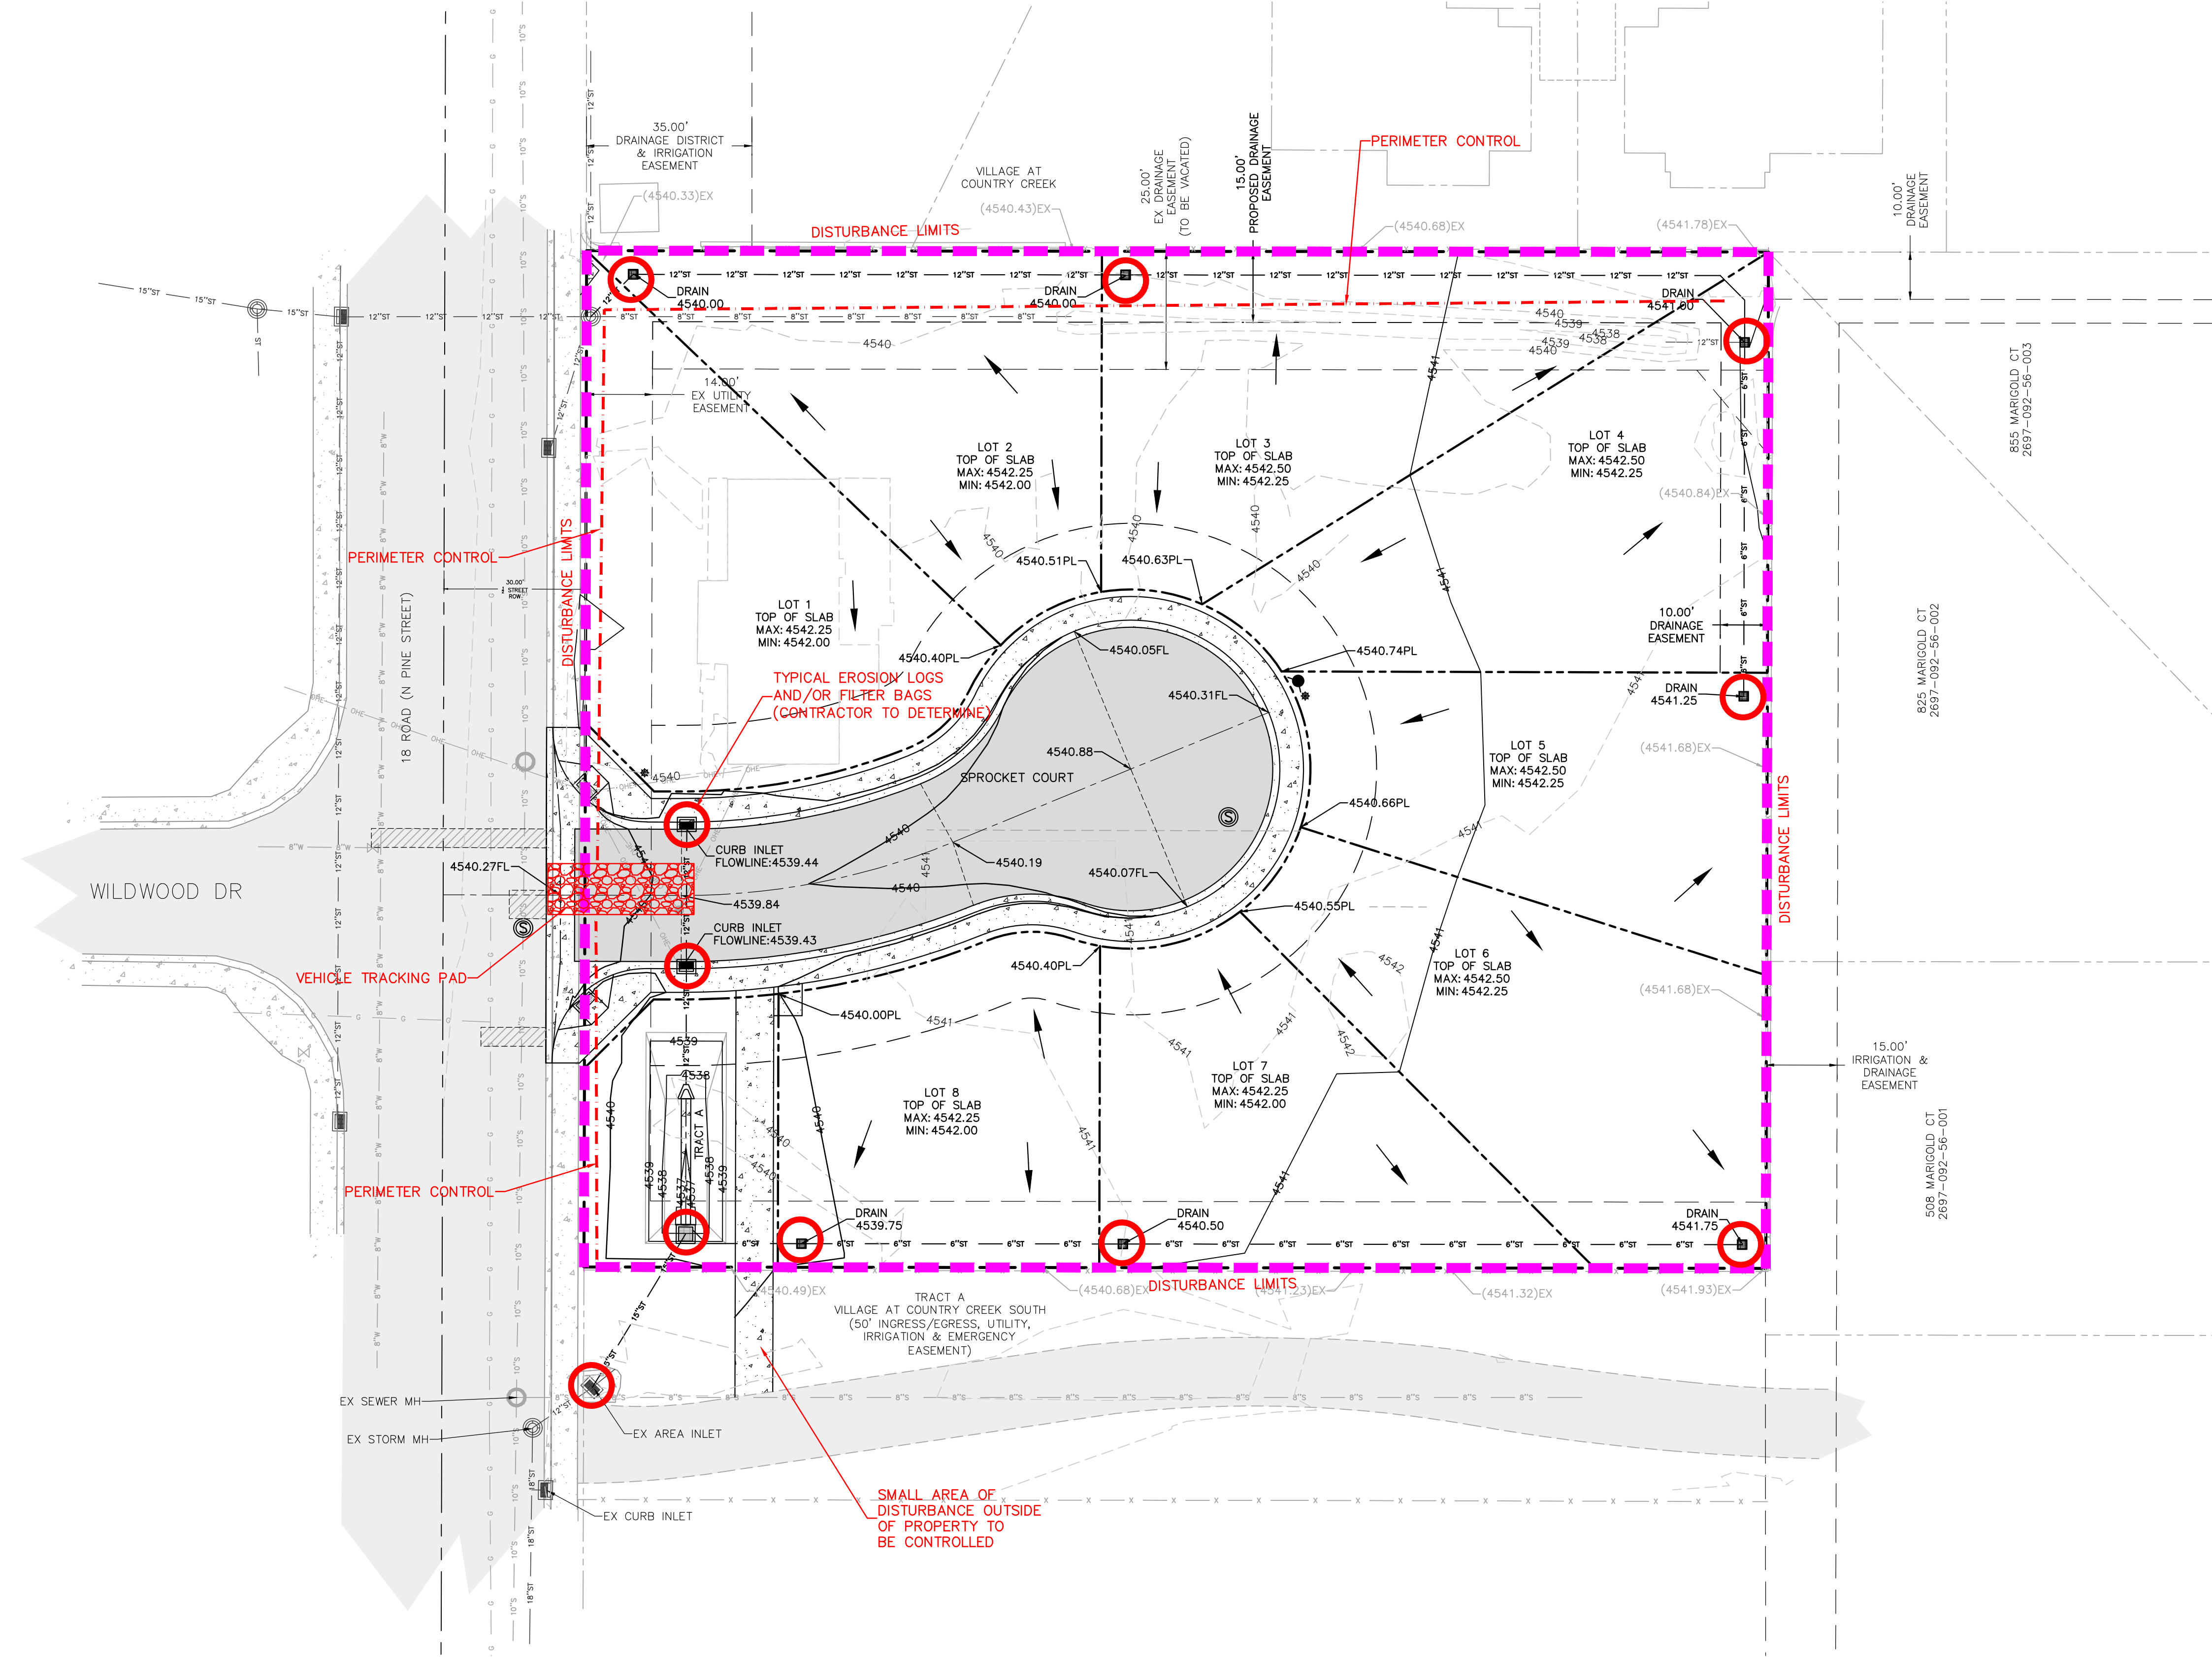

UTILITY CONTACTS	
UTE WATER DISTRICT	242-7491
CITY OF FRUITA PUBLIC WORKS	858-9558
GRAND VALLEY IRRIGATION CO.	242-2762
GRAND VALLEY DRAINAGE DISTRICT	242-4343
XCEL ENERGY	244-2781
QWEST	244-4333
CHARTER	245-8750

Know what's below.
Call before you dig.

SCALE VERIFICATION
BAR IS ONE INCH ON ORIGINAL DRAWING
IF NOT ONE INCH ON THIS SHEET
ADJUST SCALES ACCORDINGLY

NO.	REVISIONS	DATE	BY

A · C · G
AUSTIN CIVIL GROUP, INC
Land Planning • Civil Engineering • Development Services
123 N. 7th Street, Suite 300 • Grand Junction, Colorado 81501
(970) 242-7540

GEAR ESTATES
description
BEST MANAGEMENT PRACTICES
1156 18 ROAD
FRUITA, CO
prepared for
TRETYN PROPERTIES LLC

DRAWN BY:	STS
DESIGNED BY:	STS
CHECKED BY:	
APPROVED BY:	STS
JOB NUMBER:	1503.0001
DATE:	10-25-23
SCALE:	1"=10'
SHEET NO.:	BMP

APPENDIX C
INSPECTION REPORT

CONSTRUCTION STORMWATER SITE INSPECTION REPORT

Facility Name		Permittee					
Date of Inspection		Weather Conditions					
Permit Certification #		Disturbed Acreage					
Phase of Construction		Inspector Title					
Inspector Name							
Is the above inspector a qualified stormwater manager? (permittee is responsible for ensuring that the inspector is a qualified stormwater manager)			<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; text-align: center;">YES</td> <td style="width: 50%; text-align: center;">NO</td> </tr> <tr> <td style="text-align: center;"><input type="checkbox"/></td> <td style="text-align: center;"><input type="checkbox"/></td> </tr> </table>	YES	NO	<input type="checkbox"/>	<input type="checkbox"/>
YES	NO						
<input type="checkbox"/>	<input type="checkbox"/>						

INSPECTION FREQUENCY					
Check the box that describes the minimum inspection frequency utilized when conducting each inspection					
At least one inspection every 7 calendar days	<input type="checkbox"/>				
At least one inspection every 14 calendar days, with post-storm event inspections conducted within 24 hours after the end of any precipitation or snowmelt event that causes surface erosions	<input type="checkbox"/>				
<ul style="list-style-type: none"> • This is this a post-storm event inspection. Event Date: _____ 	<input type="checkbox"/>				
Reduced inspection frequency - Include site conditions that warrant reduced inspection frequency	<input type="checkbox"/>				
<ul style="list-style-type: none"> • Post-storm inspections at temporarily idle sites 	<input type="checkbox"/>				
<ul style="list-style-type: none"> • Inspections at completed sites/area 	<input type="checkbox"/>				
<ul style="list-style-type: none"> • Winter conditions exclusion 	<input type="checkbox"/>				
Have there been any deviations from the minimum inspection schedule? If yes, describe below.	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; text-align: center;">YES</td> <td style="width: 50%; text-align: center;">NO</td> </tr> <tr> <td style="text-align: center;"><input type="checkbox"/></td> <td style="text-align: center;"><input type="checkbox"/></td> </tr> </table>	YES	NO	<input type="checkbox"/>	<input type="checkbox"/>
YES	NO				
<input type="checkbox"/>	<input type="checkbox"/>				

INSPECTION REQUIREMENTS*
i. Visually verify all implemented control measures are in effective operational condition and are working as designed in the specifications
ii. Determine if there are new potential sources of pollutants
iii. Assess the adequacy of control measures at the site to identify areas requiring new or modified control measures to minimize pollutant discharges
iv. Identify all areas of non-compliance with the permit requirements, and if necessary, implement corrective action
*Use the attached Control Measures Requiring Routine Maintenance and Inadequate Control Measures Requiring Corrective Action forms to document results of this assessment that trigger either maintenance or corrective actions

AREAS TO BE INSPECTED			
Is there evidence of, or the potential for, pollutants leaving the construction site boundaries, entering the stormwater drainage system or discharging to state waters at the following locations?			
	NO	YES	If "YES" describe discharge or potential for discharge below. Document related maintenance, inadequate control measures and corrective actions Inadequate Control Measures Requiring Corrective Action form
Construction site perimeter	<input type="checkbox"/>	<input type="checkbox"/>	
All disturbed areas	<input type="checkbox"/>	<input type="checkbox"/>	
Designated haul routes	<input type="checkbox"/>	<input type="checkbox"/>	
Material and waste storage areas exposed to precipitation	<input type="checkbox"/>	<input type="checkbox"/>	
Locations where stormwater has the potential to discharge offsite	<input type="checkbox"/>	<input type="checkbox"/>	
Locations where vehicles exit the site	<input type="checkbox"/>	<input type="checkbox"/>	
Other: _____	<input type="checkbox"/>	<input type="checkbox"/>	

REPORTING REQUIREMENTS

The permittee shall report the following circumstances orally within twenty-four (24) hours from the time the permittee becomes aware of the circumstances, and shall mail to the division a written report containing the information requested within five (5) working days after becoming aware of the following circumstances. The division may waive the written report required if the oral report has been received within 24 hours.

All Noncompliance Requiring 24-Hour Notification per Part II.L.6 of the Permit		
a. Endangerment to Health or the Environment Circumstances leading to any noncompliance which may endanger health or the environment regardless of the cause of the incident (See Part II.L.6.a of the Permit) <i>This category would primarily result from the discharge of pollutants in violation of the permit</i>		
b. Numeric Effluent Limit Violations o Circumstances leading to any unanticipated bypass which exceeds any effluent limitations (See Part II.L.6.b of the Permit) o Circumstances leading to any upset which causes an exceedance of any effluent limitation (See Part II.L.6.c of the Permit) o Daily maximum violations (See Part II.L.6.d of the Permit) <i>Numeric effluent limits are very uncommon in certifications under the COR400000 general permit. This category of noncompliance only applies if numeric effluent limits are included in a permit certification.</i>		

Has there been an incident of noncompliance requiring 24-hour notification?	NO	YES	
	<input type="checkbox"/>	<input type="checkbox"/>	If "YES" document below

Date and Time of Incident	Location	Description of Noncompliance	Description of Corrective Action	Date and Time of 24 Hour Oral Notification	Date of 5 Day Written Notification *

*Attach copy of 5 day written notification to report. Indicate if written notification was waived, including the name of the division personnel who granted waiver.

After adequate corrective action(s) and maintenance have been taken, or where a report does not identify any incidents requiring corrective action or maintenance, the individual(s) designated as the Qualified Stormwater Manager, shall sign and certify the below statement:

"I verify that, to the best of my knowledge and belief, all corrective action and maintenance items identified during the inspection are complete, and the site is currently in compliance with the permit."

Name of Qualified Stormwater Manager

Title of Qualified Stormwater Manager


Signature of Qualified Stormwater Manager

Date

Notes/Comments


APPENDIX D
BMP DETAILS

BALES ARE TO BE PLACED 100-MM (4-IN.) IN THE GROUND, TIGHTLY ABUTTING WITH NO GAPS, STAKED, AND BACKFILLED AROUND THE ENTIRE OUTSIDE PERIMETER

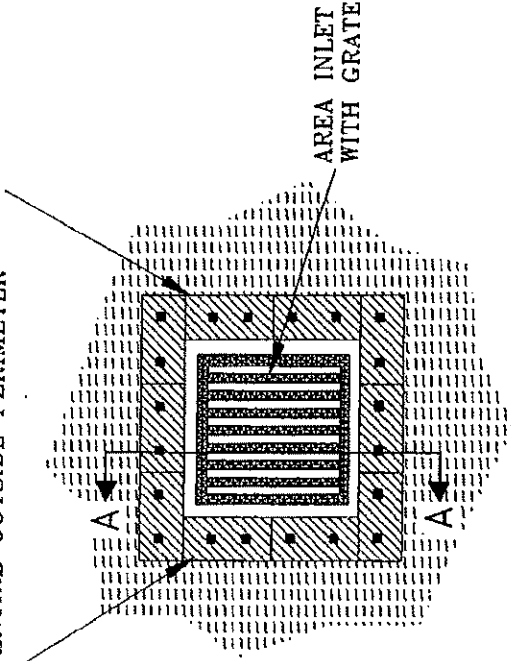

PLAN VIEW

WHEN PROPERLY INSTALLED AND MAINTAINED, WATER WILL POND AROUND THE BALES AND MAY CAUSE LOCAL FLOODING





SECTION AA

1. BALES MUST BE PROPERLY INSTALLED IN SOIL AND NOT PLACED ON TOP OF CONCRETE OR PAVEMENT.
2. SINCE 1992, THE USEPA HAS NOT RECOGNIZED BALE BARRIERS AS AN APPROPRIATE STRUCTURAL METHOD TO REDUCE SEDIMENT IN RUNOFF WATERS.


© 2001 

BALE BARRIER FOR AREA DRAINS


4/01




STEP 3. EROSION BALES SHALL BE ENTRENCHED 4 IN MINIMUM INTO THE SOIL, TIGHTLY ADJUSTED WITH NO GAPS, STAKED AND BACKFILLED AROUND THE ENTIRE OUTSIDE PERIMETER.



TYPICAL EROSION BALES TRENCHING AND STAKING



SILT FENCE






EROSION BALES SHALL BE ENTRENCHED 4 IN MINIMUM INTO THE SOIL, TIGHTLY ADJUSTED WITH NO GAPS, STAKED AND BACKFILLED AROUND THE ENTIRE OUTSIDE PERIMETER.

PLAN VIEW

CULVERT EROSION BALES INLET PROTECTION

REMOVE ACCUMULATED SEDIMENT WHEN IT REACHES ONE HALF OF EROSION SILT FENCE OR BALE HEIGHT. INSPECTION SHALL BE PERFORMED CONTINUOUSLY FOR PROPER FUNCTION.

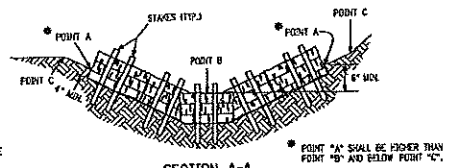

CHANNEL PROFILE SPACING BETWEEN EROSION BALES

NOTE: EROSION BALES SHALL BE ENTRENCHED 4 IN MINIMUM INTO THE SOIL, TIGHTLY ADJUSTED WITH NO GAPS, STAKED AND BACKFILLED AROUND THE ENTIRE OUTSIDE PERIMETER.

Computer File Information	
Creation Date: 07/04/08	Plotted: S.M.
Last Modification Date: 07/04/08	Issued: LTA
File Path: www.dot.state.co.us/DesignSupport/	CREO
Drawing File Name: 208010107.dwg	CREO
CAD User: MicroStation V8	Scale: Not to Scale
	Units: English

Sheet Revisions	
Date:	Comments:


Colorado Department of Transportation
 4201 East Arkansas Avenue
 Denver, Colorado 80222
 Phone: (303) 757-9003
 Fax: (303) 757-8800

Project Development Branch SRJ/LTA


TEMPORARY EROSION CONTROL

Issued By: Project Development Branch, July 04, 2008


STANDARD PLAN NO.
 M-208-1
 Sheet No. 1 of 7




PLAN VIEW




PLAN VIEW




PLAN VIEW

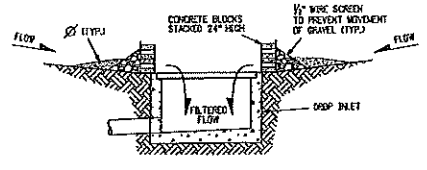

SECTION A-A

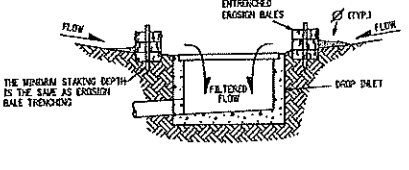

SECTION B-B



SECTION C-C

STORM DRAIN INLET PROTECTION (TYPE R)

NOTE
 REMOVE ACCUMULATED SEDIMENT WHEN IT REACHES ONE HALF OF EXPOSED INLET PROTECTION HEIGHT. INSPECTION SHALL BE PERFORMED CONTINUOUSLY FOR PROPER FUNCTION.






STORM DRAIN INLET PROTECTION (TYPE C OR D)

INLET EROSION BALE FILTER (TYPE C OR D)

NOTE: EROSION BALES ARE TO BE ENTRENCHED 4 IN. INTO THE SOIL, TIGHTLY ADJUTING WITH NO GAPS. STAKES AND BACKFILLED AROUND THE ENTIRE OUTSIDE PERIMETER OF GRADE OR SLOPE AND DITCH PAVING.

- NOTES:**
1. INLET PROTECTION SHALL EXTEND 12 IN. PAST EACH END OF THE INLET AND BE 4 IN. TO 6 IN. IN DIAMETER.
 2. INLET PROTECTION MAY CONSIST OF CONTINUOUS FILTER TUBING FILLED WITH GRAVEL OR PREMANUFACTURED DEVICE.

Computer File Information Creation Date: 07/04/06 JnlEds: SJS Last Modification Date: 07/04/06 JnlEds: LTA File Path: www.dot.state.co.us/DesignSupport/ Drawing File Name: 208010307.dgn CAD User: MoresStation V8 Scale: Not to Scale Units: English		Sheet Revisions <table border="1"> <thead> <tr> <th>Date:</th> <th>Comments</th> </tr> </thead> <tbody> <tr> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> </tr> </tbody> </table>		Date:	Comments							Colorado Department of Transportation  4201 East Arkansas Avenue Denver, Colorado 80222 Phone: (303) 767-9183 Fax: (303) 767-8820 Project Development Branch SRJ/LTA		TEMPORARY EROSION CONTROL Issued By: Project Development Branch July 04, 2006		STANDARD PLAN NO. M-208-1 Sheet No. 3 of 7	
Date:	Comments																

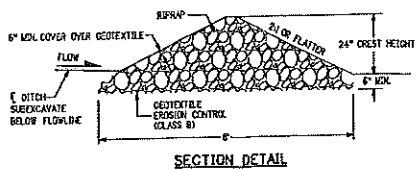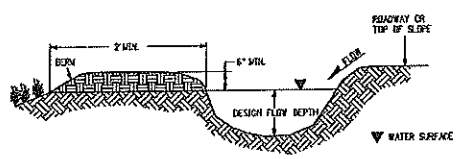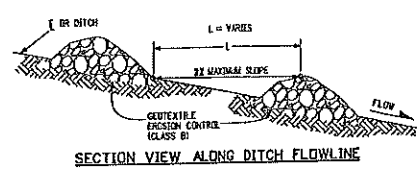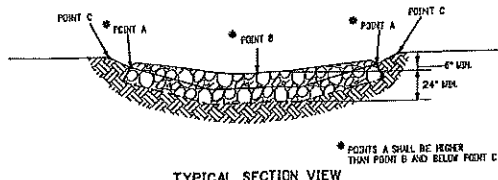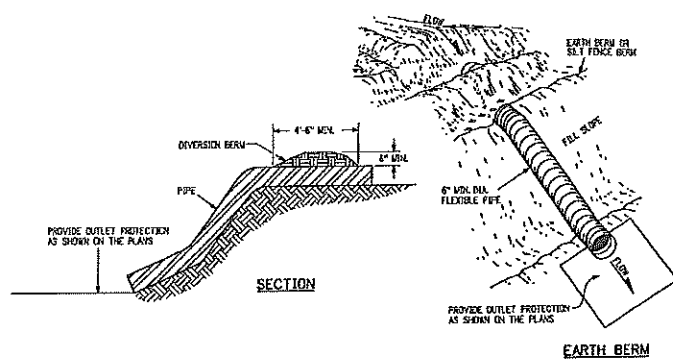

- NOTES:
1. RIPRAP SIZE 0550 = 6 IN. OR AS SHOWN ON THE PLANS.
 2. THE EDGES OF RIPRAP CHECK DAM SHALL BE A MINIMUM OF 6 IN. HIGHER THAN CENTER OF CHECK DAM.
 3. SEDIMENT SHALL BE REMOVED WHEN THE DEPTH UPSTREAM FROM CHECK DAM IS 1/2 THE CREST HEIGHT.
 4. CHECK DAMS MAY BE TEMPORARY OR PERMANENT AS SHOWN ON THE PLANS.

Computer File Information	
Creation Date: 07/04/06	Issue: S:R
Last Modification Date: 07/04/06	Issue: LTA
File Path: www.dcl.state.co.us/Dev/ps/Support/V	
Drawlog File Name: 208010407.dgn	
OID: Var: MacroStation V8	Scale: Not to Scale
	Unit: English

Sheet Revisions	
Date:	Comments:










Colorado Department of Transportation
 4201 East Arkansas Avenue
 Denver, Colorado 80222
 Phone: (303) 757-9083
 Fax: (303) 767-0870

Project Development Branch SRJ/LTA

TEMPORARY EROSION CONTROL

Issued By: Project Development Branch July 04, 2006

STANDARD PLAN NO.
M-208-1
Sheet No. 4 of 7

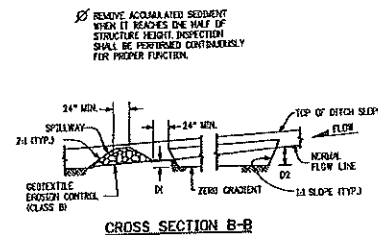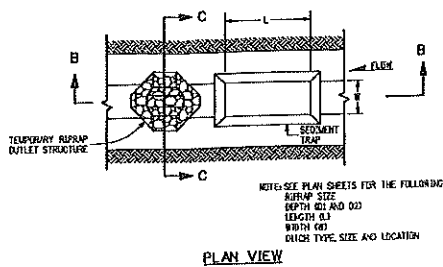

Computer File Information	
Creation Date: 07/04/06	Initiator: SJR
Last Modification Date: 07/04/06	Initiator: LTA
Full Path: www.dot.state.co.us/Des/psSupport17	(REV)
Drawing File Name: 208010607.dgn	(REV)
CAD Ver: MicroStation V8	Scale: N/A to Scale
	Units: English

Sheet Revisions	
Date:	Comments:


Colorado Department of Transportation
 4201 East Arkansas Avenue
 Denver, Colorado 80222
 Phone: (303) 767-9083
 Fax: (303) 767-9082

Project Development Branch SRJ/LTA


TEMPORARY EROSION CONTROL

Issued By: Project Development Branch, July 04, 2006


STANDARD PLAN NO.
 M-208-1
 Sheet No. 5 of 7

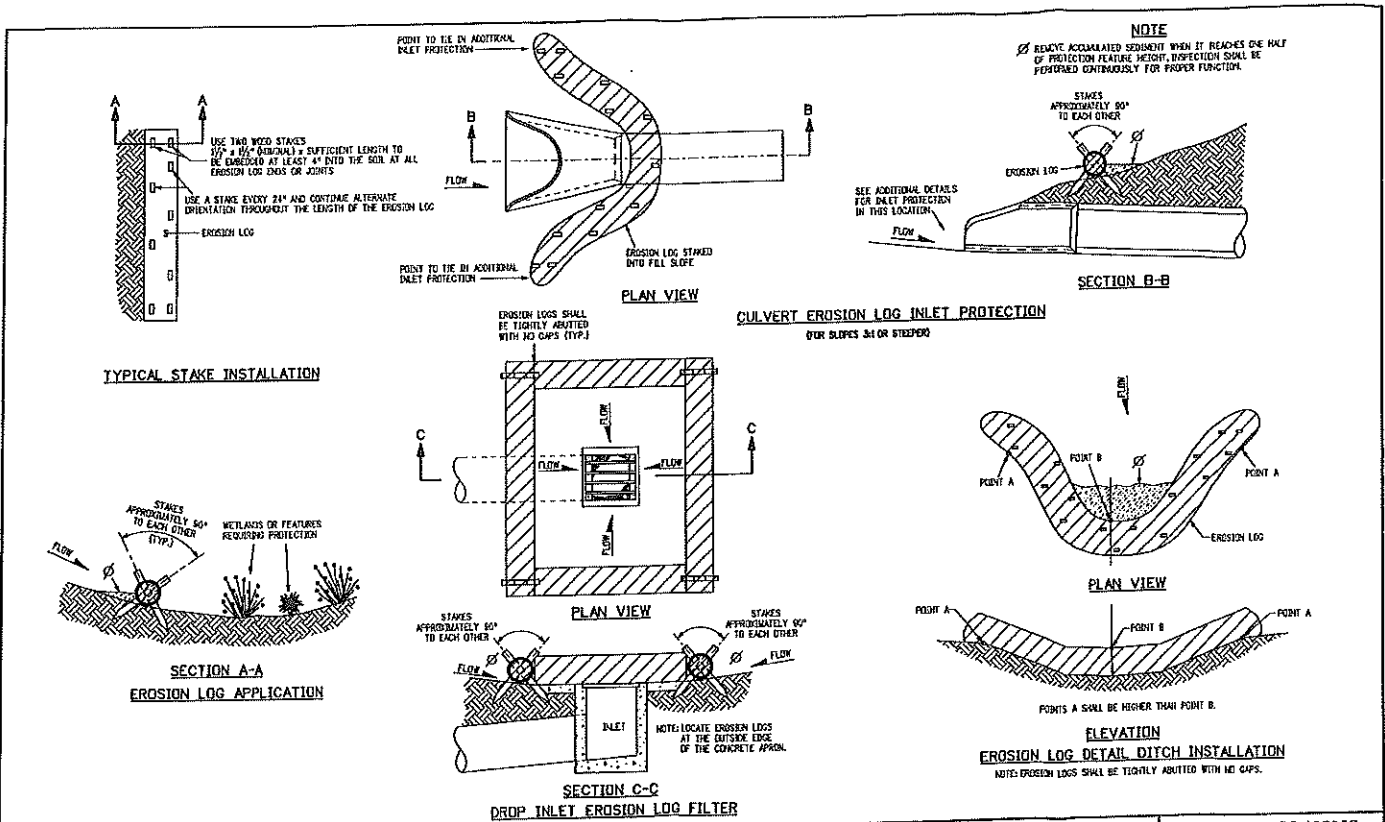

Computer File Information		Sheet Revisions		Colorado Department of Transportation 4201 East Arkansas Avenue Denver, Colorado 80222 Phone: (303) 759-8053 Fax: (303) 757-9920	TEMPORARY EROSION CONTROL Issued By: Project Development Branch, July 04, 2006	STANDARD PLAN NO. M-208-1 Sheet No. 7 of 7
Creation Date: 07/04/06 Last Modification Date: 07/04/06 Full Path: www.dot.state.co.us/DesignSupport/ Drawing File Name: 208010707.dgn CAD Ver: MicroStation V8 Scale: Not to Scale Units: English	Database: SURT Discipline: LTA (R) (X) (R) (X) (R) (X)	Date: _____ Comments: _____ _____ _____				

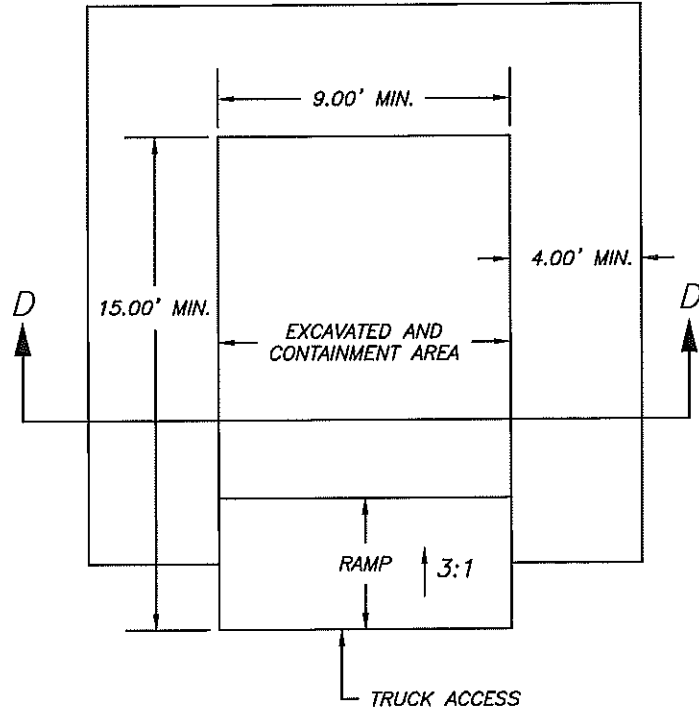

PLAN VIEW

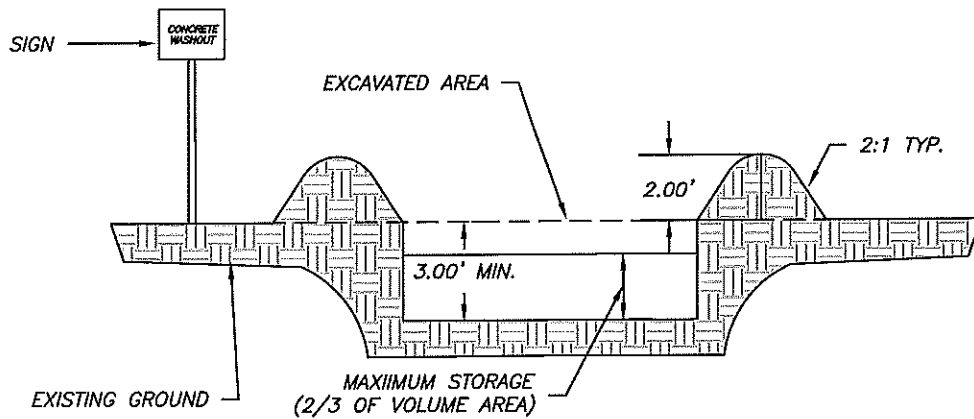


SECTION D-D

CONCRETE WASHOUT STRUCTURE

NOTE:

1. EROSION BALES MAY BE USED AS AN ALTERNATIVE FOR THE BERM.

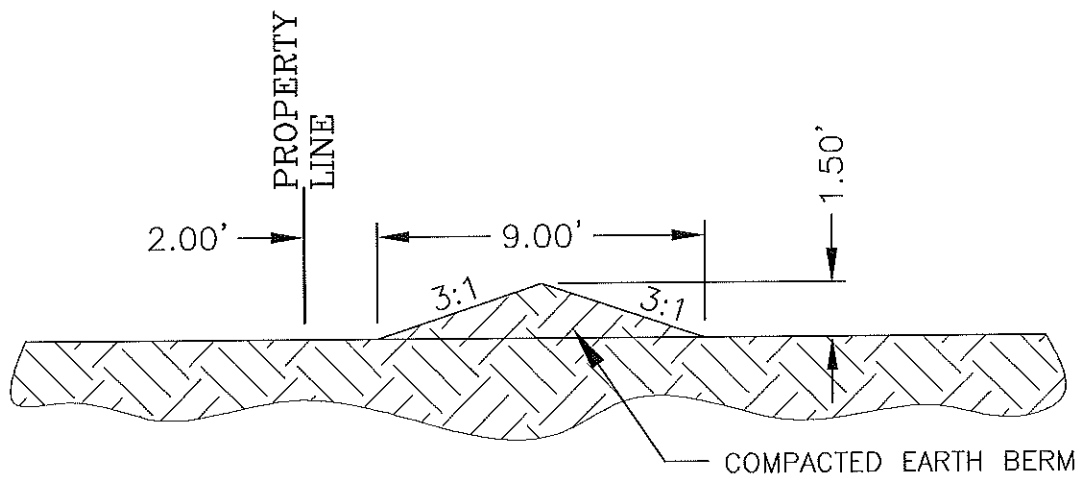

TYPICAL EROSION CONTROL BERM SECTION

NTS

BEST MANAGEMENT PRACTICES FOR CONTRACTORS AND INSPECTORS

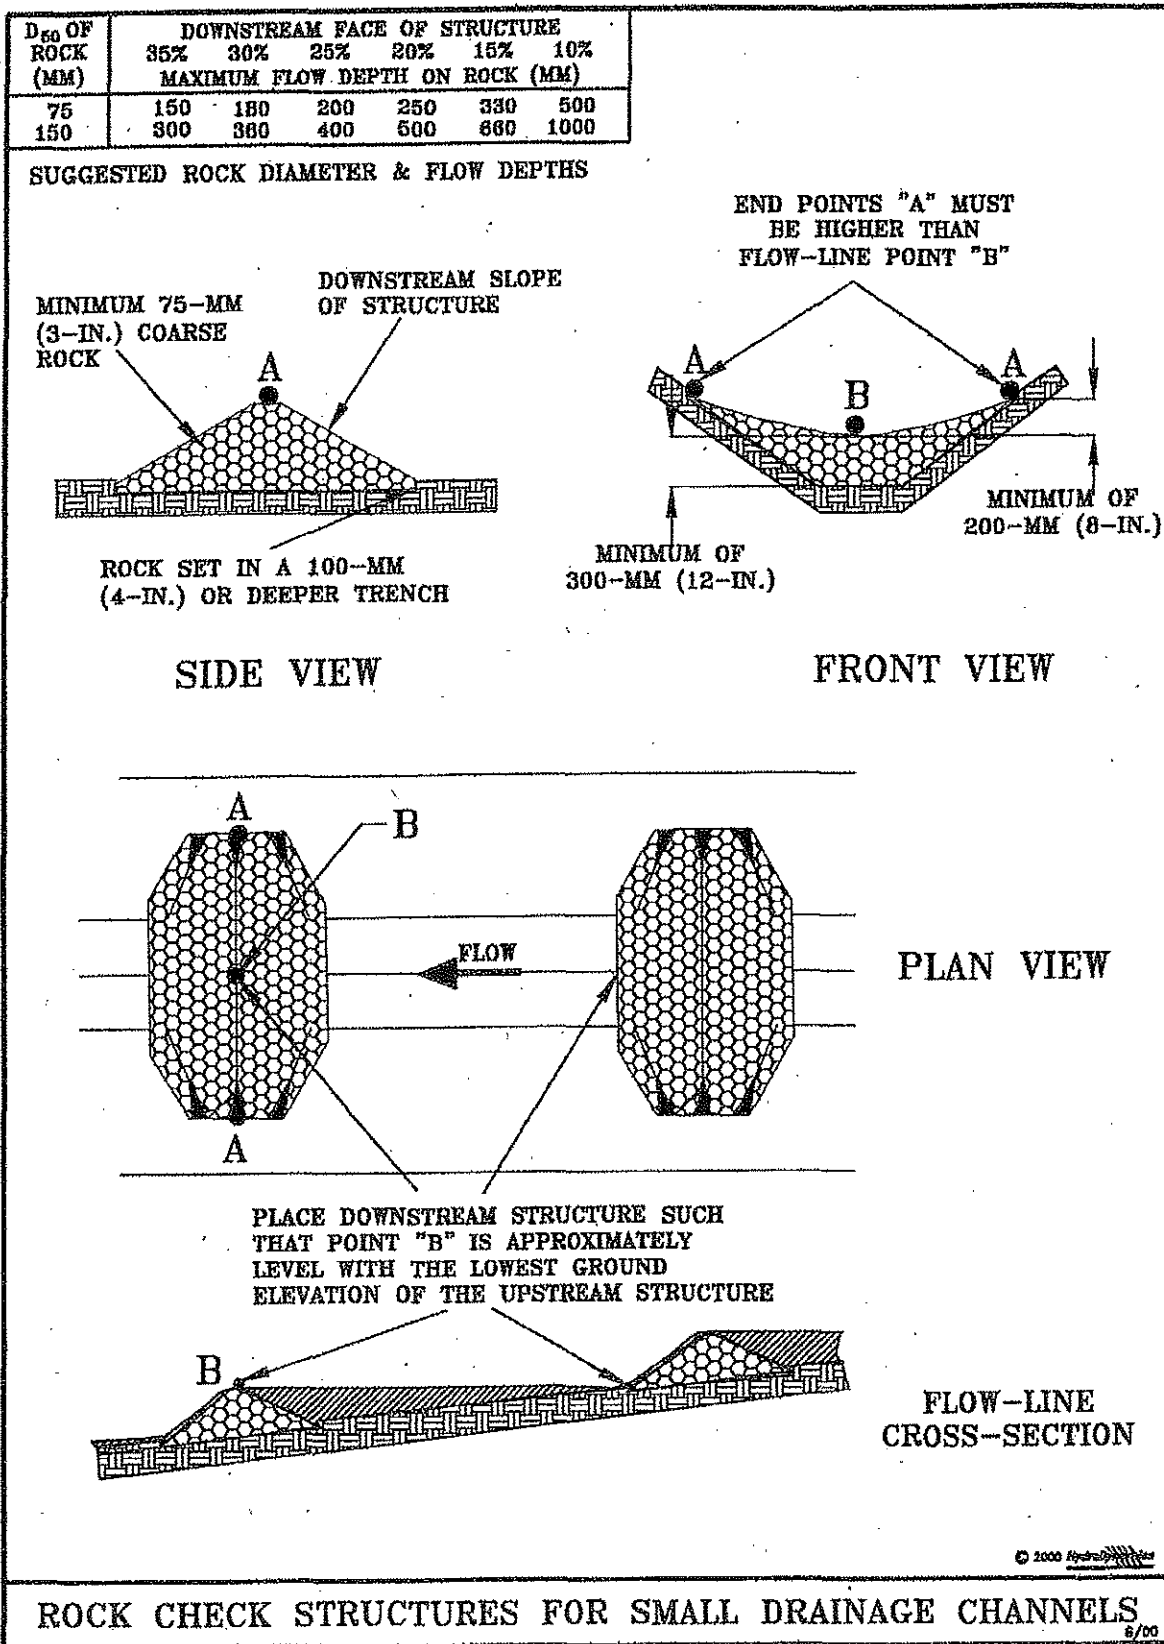


Figure 31. Rock Check Structures for Small Drainage Channels

Description

A rock sock is constructed of gravel that has been wrapped by wire mesh or a geotextile to form an elongated cylindrical filter. Rock socks are typically used either as a perimeter control or as part of inlet protection. When placed at angles in the curb line, rock socks are typically referred to as curb socks. Rock socks are intended to trap sediment from stormwater runoff that flows onto roadways as a result of construction activities.



Photograph RS-1. Rock socks placed at regular intervals in a curb line can help reduce sediment loading to storm sewer inlets. Rock socks can also be used as perimeter controls.

Appropriate Uses

Rock socks can be used at the perimeter of a disturbed area to control localized sediment loading. A benefit of rock socks as opposed to other perimeter controls is that they do not have to be trenched or staked into the ground; therefore, they are often used on roadway construction projects where paved surfaces are present.

Use rock socks in inlet protection applications when the construction of a roadway is substantially complete and the roadway has been directly connected to a receiving storm system.

Design and Installation

When rock socks are used as perimeter controls, the maximum recommended tributary drainage area per 100 lineal feet of rock socks is approximately 0.25 acres with disturbed slope length of up to 150 feet and a tributary slope gradient no steeper than 3:1. A rock sock design detail and notes are provided in Detail RS-1. Also see the Inlet Protection Fact Sheet for design and installation guidance when rock socks are used for inlet protection and in the curb line.



When placed in the gutter adjacent to a curb, rock socks should protrude no more than two feet from the curb in order for traffic to pass safely. If located in a high traffic area, place construction markers to alert drivers and street maintenance workers of their presence.

Maintenance and Removal

Rock socks are susceptible to displacement and breaking due to vehicle traffic. Inspect rock socks for damage and repair or replace as necessary. Remove sediment by sweeping or vacuuming as needed to maintain the functionality of the BMP, typically when sediment has accumulated behind the rock sock to one-half of the sock's height.

Once upstream stabilization is complete, rock socks and accumulated sediment should be removed and properly disposed.

Rock Sock	
Functions	
Erosion Control	No
Sediment Control	Yes
Site/Material Management	No

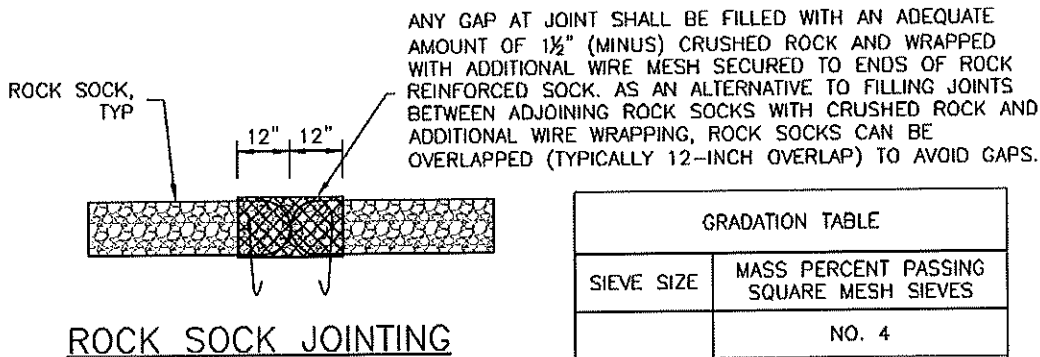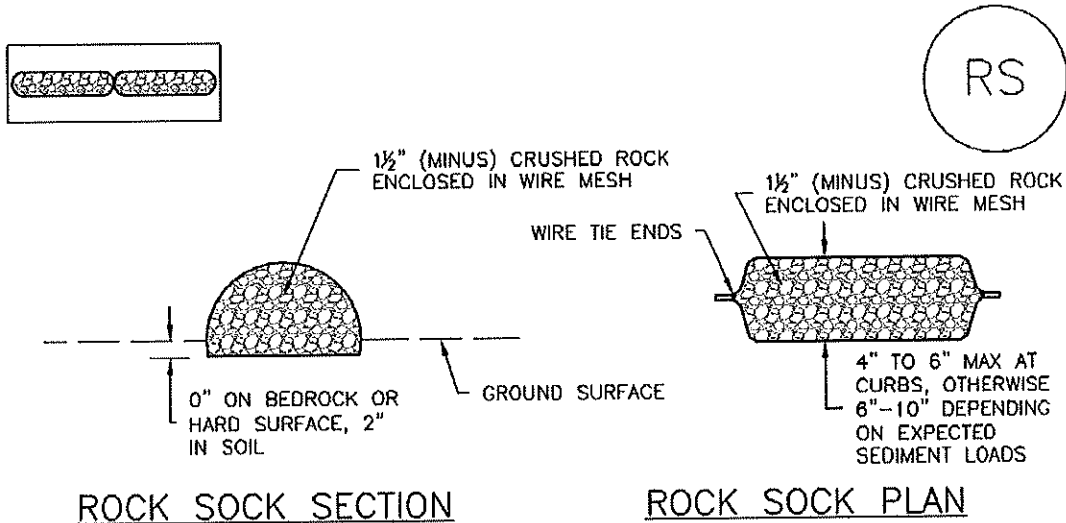

GRADATION TABLE	
SIEVE SIZE	MASS PERCENT PASSING SQUARE MESH SIEVES
	NO. 4
2"	100
1 1/2"	90 - 100
1"	20 - 55
3/4"	0 - 15
3/8"	0 - 5
MATCHES SPECIFICATIONS FOR NO. 4 COARSE AGGREGATE FOR CONCRETE PER AASHTO M43. ALL ROCK SHALL BE FRACTURED FACE, ALL SIDES.	

ROCK SOCK INSTALLATION NOTES

- SEE PLAN VIEW FOR:
-LOCATION(S) OF ROCK SOCKS.
- CRUSHED ROCK SHALL BE 1 1/2" (MINUS) IN SIZE WITH A FRACTURED FACE (ALL SIDES) AND SHALL COMPLY WITH GRADATION SHOWN ON THIS SHEET (1 1/2" MINUS).
- WIRE MESH SHALL BE FABRICATED OF 10 GAGE POULTRY MESH, OR EQUIVALENT, WITH A MAXIMUM OPENING OF 1/2", RECOMMENDED MINIMUM ROLL WIDTH OF 48"
- WIRE MESH SHALL BE SECURED USING "HOG RINGS" OR WIRE TIES AT 6" CENTERS ALONG ALL JOINTS AND AT 2" CENTERS ON ENDS OF SOCKS.
- SOME MUNICIPALITIES MAY ALLOW THE USE OF FILTER FABRIC AS AN ALTERNATIVE TO WIRE MESH FOR THE ROCK ENCLOSURE.

RS-1. ROCK SOCK PERIMETER CONTROL


ROCK SOCK MAINTENANCE NOTES

1. INSPECT BMPs EACH WORKDAY, AND MAINTAIN THEM IN EFFECTIVE OPERATING CONDITION. MAINTENANCE OF BMPs SHOULD BE PROACTIVE, NOT REACTIVE. INSPECT BMPs AS SOON AS POSSIBLE (AND ALWAYS WITHIN 24 HOURS) FOLLOWING A STORM THAT CAUSES SURFACE EROSION, AND PERFORM NECESSARY MAINTENANCE.
2. FREQUENT OBSERVATIONS AND MAINTENANCE ARE NECESSARY TO MAINTAIN BMPs IN EFFECTIVE OPERATING CONDITION. INSPECTIONS AND CORRECTIVE MEASURES SHOULD BE DOCUMENTED THOROUGHLY.
3. WHERE BMPs HAVE FAILED, REPAIR OR REPLACEMENT SHOULD BE INITIATED UPON DISCOVERY OF THE FAILURE.
4. ROCK SOCKS SHALL BE REPLACED IF THEY BECOME HEAVILY SOILED, OR DAMAGED BEYOND REPAIR.
5. SEDIMENT ACCUMULATED UPSTREAM OF ROCK SOCKS SHALL BE REMOVED AS NEEDED TO MAINTAIN FUNCTIONALITY OF THE BMP, TYPICALLY WHEN DEPTH OF ACCUMULATED SEDIMENTS IS APPROXIMATELY $\frac{1}{2}$ OF THE HEIGHT OF THE ROCK SOCK.
6. ROCK SOCKS ARE TO REMAIN IN PLACE UNTIL THE UPSTREAM DISTURBED AREA IS STABILIZED AND APPROVED BY THE LOCAL JURISDICTION.
7. WHEN ROCK SOCKS ARE REMOVED, ALL DISTURBED AREAS SHALL BE COVERED WITH TOPSOIL, SEEDED AND MULCHED OR OTHERWISE STABILIZED AS APPROVED BY LOCAL JURISDICTION.



(DETAIL ADAPTED FROM TOWN OF PARKER, COLORADO AND CITY OF AURORA, COLORADO, NOT AVAILABLE IN AUTOCAD)

NOTE: MANY JURISDICTIONS HAVE BMP DETAILS THAT VARY FROM UDFCD STANDARD DETAILS. CONSULT WITH LOCAL JURISDICTIONS AS TO WHICH DETAIL SHOULD BE USED WHEN DIFFERENCES ARE NOTED.

NOTE: THE DETAILS INCLUDED WITH THIS FACT SHEET SHOW COMMONLY USED, CONVENTIONAL METHODS OF ROCK SOCK INSTALLATION IN THE DENVER METROPOLITAN AREA. THERE ARE MANY OTHER SIMILAR PROPRIETARY PRODUCTS ON THE MARKET. UDFCD NEITHER ENDORSES NOR DISCOURAGES USE OF PROPRIETARY PROTECTION PRODUCTS; HOWEVER, IN THE EVENT PROPRIETARY METHODS ARE USED, THE APPROPRIATE DETAIL FROM THE MANUFACTURER MUST BE INCLUDED IN THE SWMP AND THE BMP MUST BE INSTALLED AND MAINTAINED AS SHOWN IN THE MANUFACTURER'S DETAILS.

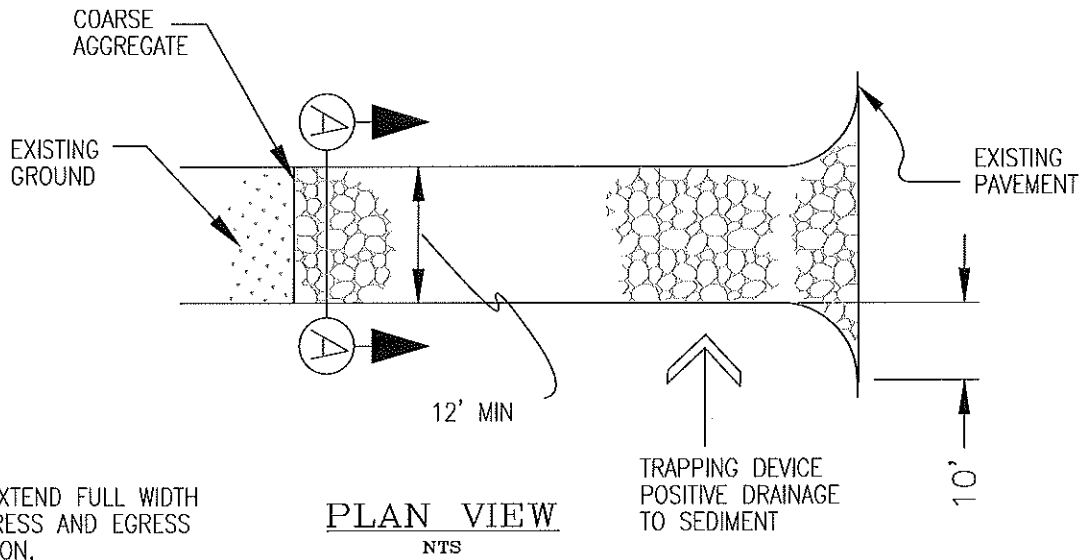

* MUST EXTEND FULL WIDTH OF INGRESS AND EGRESS OPERATION.

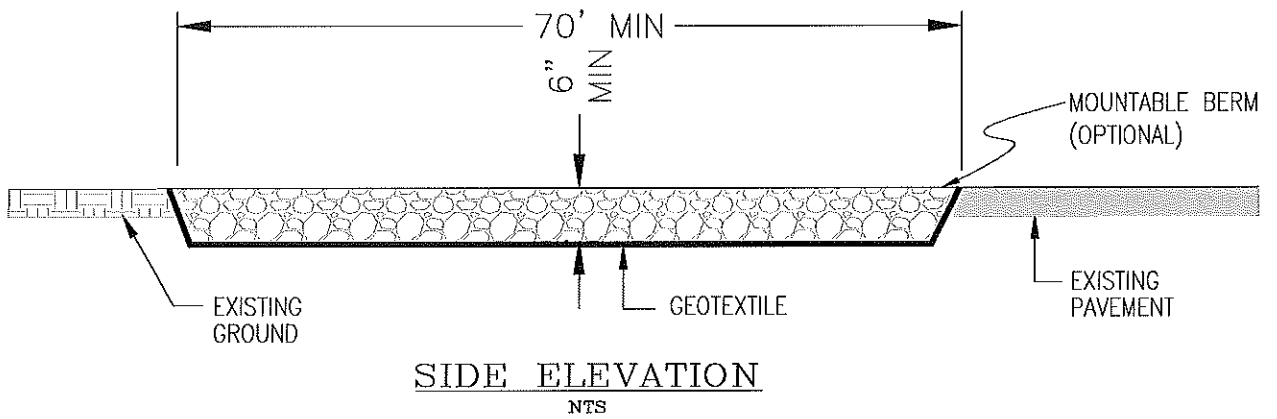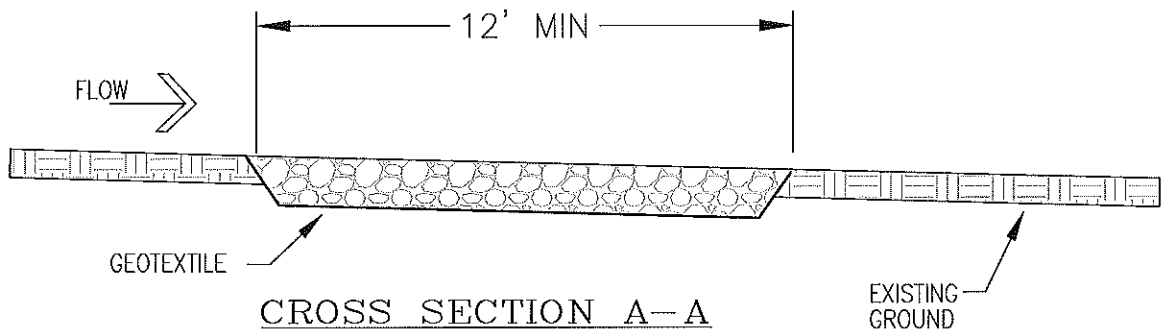

VEHICLE TRACKING PAD
NTS